

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

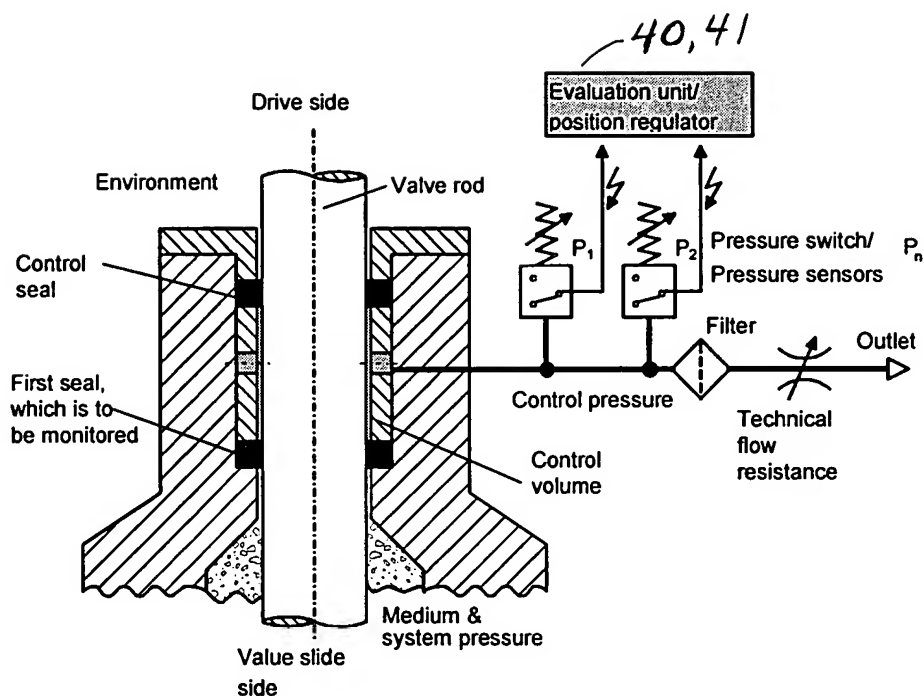


Figure 2: Continuous monitoring of a seal by observing the control pressure, in this case, by way of example, by means of two pressure switches



PHB71676

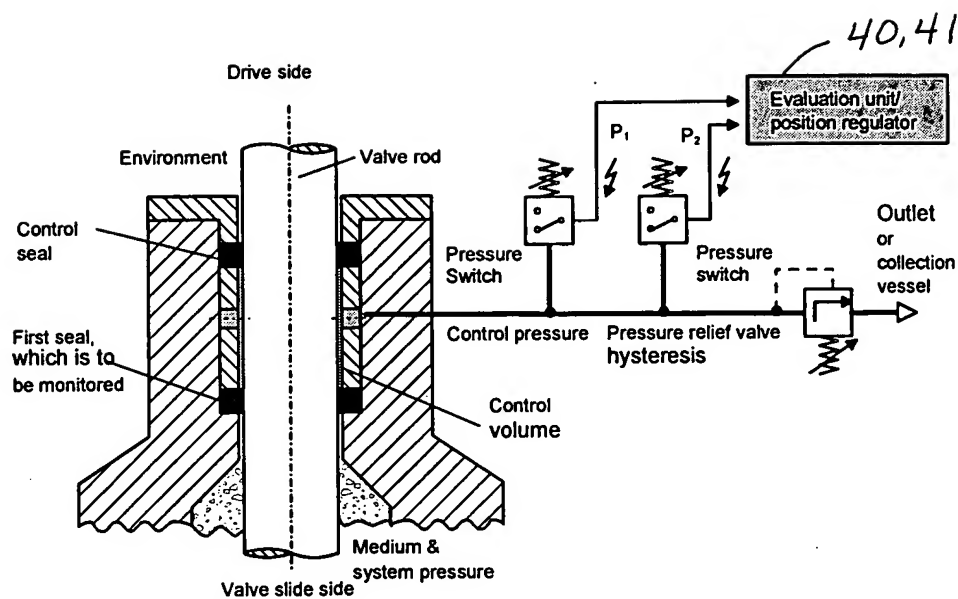


Figure 3: Monitoring of a seal by observing the control pressure, venting from time to time via a pressure relief valve with hysteresis



PHB71676

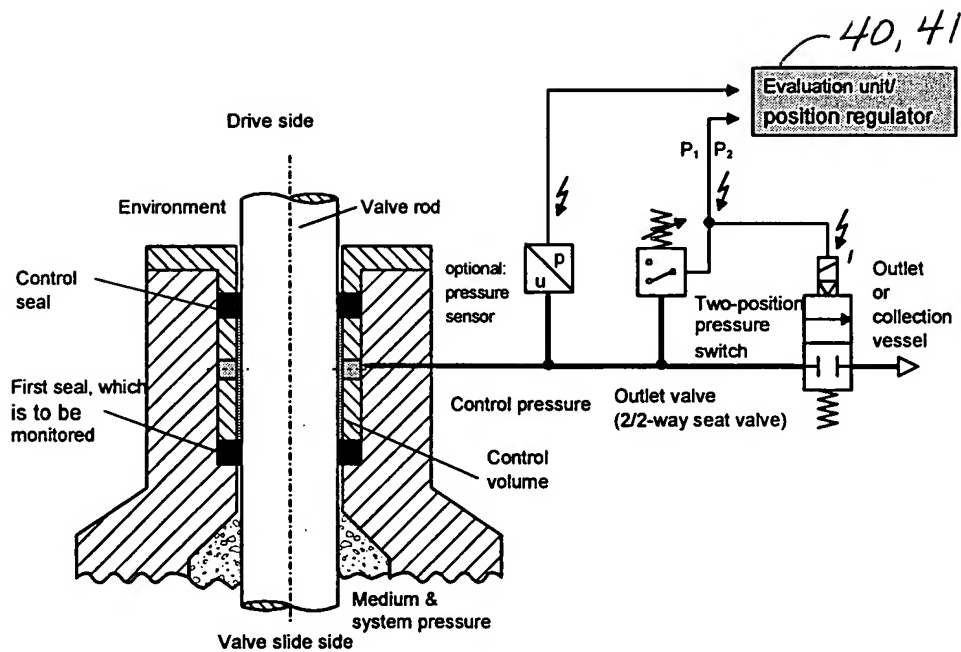


Figure 4: Monitoring of a seal by observing the control pressure, venting from time to time via a 2/2-way switching valve of the "normally closed" type, driving for example by means of two-position pressure switch



PHB71676

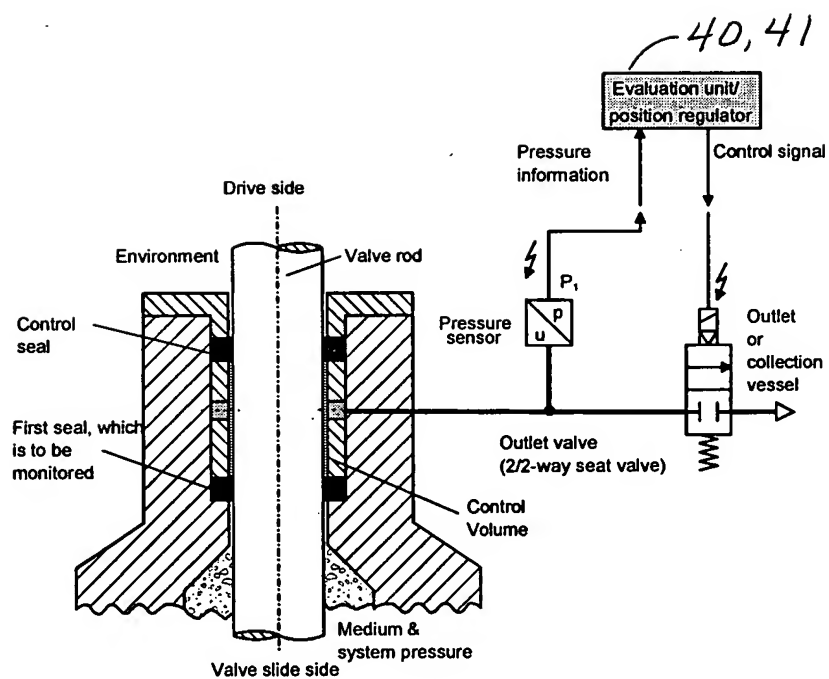


Figure 5: Monitoring of a seal by observing the control pressure, venting from time to time via a 2/2-way switching valve of the "normally closed" type, driving via evaluation unit